


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Dalle QD-OLED nouvelle génération pour des images d'une qualité incroyable
- Temps de réponse ultrarapide de seulement 0,03 ms et taux de rafraîchissement de 240 Hz
- QD Premium Color pour assurer des couleurs qui répondent aux normes du marché, avec valeur Delta E≤2
- Norme VESA DisplayHDR True Black 400 pour des visuels HDR à couper le souffle
- Gaming Intelligence App pour facilement paramétrer vos jeux
- MSI OLED Care 2.0 pour réduire les risques de brûlures de la dalle OLED
- Module KVM pour contrôler plusieurs appareils via votre clavier, votre souris et votre écran
- Mode Console avec port HDMI™ 2.1 et bande passante totale de 48 Gb/s
- Garantie OLED 3 ans incluant une protection contre les problèmes de brûlures des dalles OLED

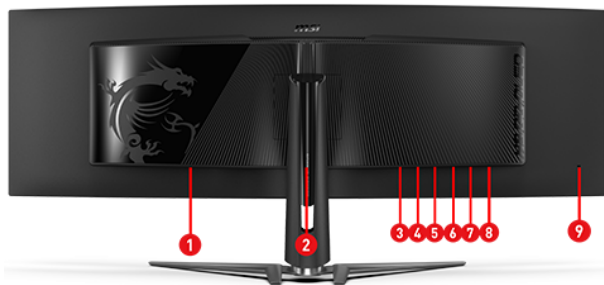

1. Entrée alimentation
2. Joystick de navigation à 5 directions
3. 2 x HDMI™ 2.1 (DQHD@240Hz)
4. Display Port 1.4a
5. USB Type-C PD 98W
6. 2 x USB 2.0 Type-A
7. USB 2.0 Type-B
8. Sortie écouteurs
9. Encoche Kensington

SPECIFICATION

Modèle	Part No	9S6-3FA84T-028
	Color	ID1/Black-Black
Affichage	Screen Size	49" (124.46 cm)
	Active Display Area (mm)	1196.7(H) x 339.2(V)
	Curvature	Curve 1800R
	Panel Type	QD-OLED
	Resolution	5120x1440 (DQHD)
	Pixel pitch (mm)	0.233(H)x0.233(V)
	Aspect Ratio	32:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~240Hz
	HDR (High dynamic range)	True Black 400
	SDR Brightness (nits)	250
	HDR Brightness (Peak nits)	1000
	Contrast Ratio	1500000:1
	Signal Frequency	30~390 KHz(H) / 48~240 Hz(V)
	Refresh Rate	240HZ
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	127.4%/94.11%
	NTSC (CIE1931 area percentage/overlap)	108.47%/93.21%
	sRGB (CIE1976 area percentage/overlap)	146.11%/100%
	sRGB (CIE1931 area percentage/overlap)	153.15%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	125.24%/98.07%
	Adobe RGB (CIE1931 area percentage/overlap)	113.53%/95.78%
	DCI-P3 (CIE1976 area percentage/overlap)	116.34%/99.28%
	DCI-P3 (CIE1931 area percentage/overlap)	112.9%/99.06%
	Rec.709 (CIE1976 area percentage/overlap)	146.11%/100%
	Rec.709 (CIE1931 area percentage/overlap)	153.15%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	84.78%/84.4%
	Rec.2020 (CIE1931 area percentage/overlap)	81%/80.92%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
Ports E/S	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 2.0 Type A	2
	USB 2.0 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.4a
	DisplayPort HDCP version	2.3
	DisplayPort	1
Garantie	Warranty	36M
Alimentation	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	50
	Annual Energy Consumption (KWh)	75
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	G
	Power Cord Type	C13



É C R A N S G A M I N G

MPG 491CQPX QD-OLED

M P G 4 9 1 C Q P X Q D - O L E D

Accessoires	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 100 mm
	VESA Mounting	100x100mm
Dimension & Weight (product)	Product Dimension with Stand (WxDxH) (mm)	1195 x 328 x 410
	Product Dimension without Stand (WxDxH) (mm)	1195 x 190 x 372
	Stand Dimension (WxDxH) (mm)	634 x 318 x 371
	Weight (Net kg)	10.6
	Weight Without Stand (kg)	8.5
Dimensions et poids (carton)	Inside Carton Dimension (WxDxH) (cm)	133.2 x 28.6 x 49.3
	Outer Carton Dimension (WxDxH) (cm)	135 x 30.1 x 52
	Weight (Gross kg)	16.4
Code-barre	EAN	4711377237932